


Art. no. 348161

Surface-mounted ceiling light Lucea Tilt, 10 W,
3000/4000 K, white

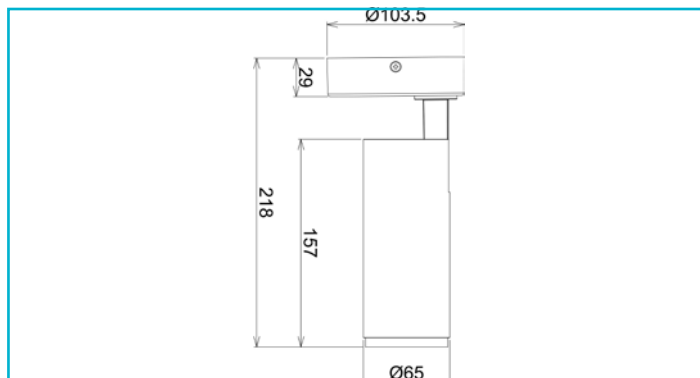

Housing Material	Aluminium	Life Time L70 / B50	50000 h
Housing Color	White	Switching Cycles	100000
Material of Lens	PMMA	Power Consumption	10 kWh/1000h
		EEL	F
Protection Class	Protection class I/protective grounding		
Rated Input	10 W		
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Dimmable	Yes		
Control	Leading-edge dimmer, Trailing-edge dimmer		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000/4000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	90		
Rated Luminous Flux	1000 lm		
Rated Angle of Reflection	36 Degree		
Distribution Characteristic 120°	DLS		
Swivel Angle	90 Degree		
Rotation Angle	350 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Height	218 mm		
Diameter	65 mm		
Working Temperature	-20 to 40 °C		
Storage Temperature	-20 to 65 °C		
IP Protection Class	IP 20		