


**Power supply unit (CV, DC)
FLAT, CV, UT 12 V/12 W**

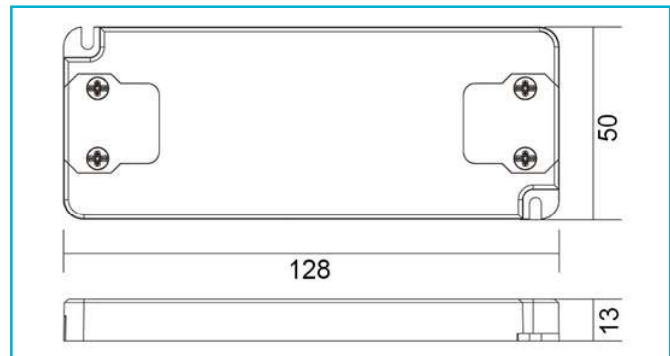

Special features

- Ideal for concealed mounting in ceiling coves
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	12 W
Output Voltage	12 V/DC
Output Current	0-1000 mA
Power Factor	0.90
Max. units per MCB B10	17
Max. units per MCB B16	28
Max. units per MCB C10	37
Max. units per MCB C16	59
Inrush Current max.	50 A / 300 μs
Capacitive Load	446 μF
Reference Point Tc	85 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20
Life Time	30000 h
Length	128 mm
Width	50 mm
Height	13 mm
Product weight	68 g

