


**Power supply unit (CC, DC)
FLAT, CC, UT350 mA/6 W**

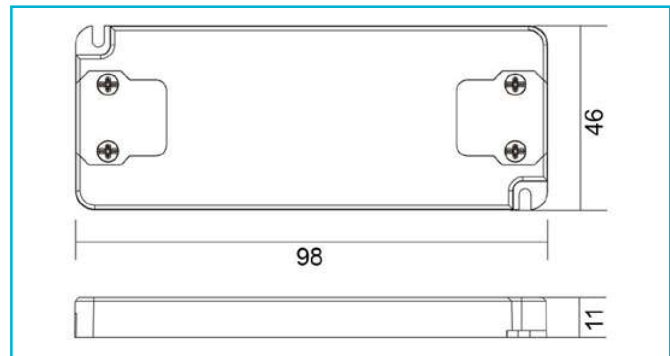

Special features

- Flicker-free
- Secured against short circuits and overloads
- Overheating protection

Housing Material Plastic
Housing Color Black
Functions Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Operating Mode Constant current
Protection Class Protection class II/protective insulation
Rated Input Voltage Frequency 220-240 V/AC 50 / 60 Hz
Power 0.7-6 W
Output Voltage 2-18 V/DC
Output Current 350 mA
Power Factor 0.56

Max. units per MCB B10 17
Max. units per MCB B16 28
Max. units per MCB C10 37
Max. units per MCB C16 59
Inrush Current max. 10 A / 300 μs
Capacitive Load 40.44 nF
Reference Point Tc 80 °C
Working Temperature -20 to 50 °C
Storage Temperature -20 to 70 °C
IP Protection Class IP 20

Life Time 30000 h

Length 98 mm
Width 46 mm
Height 11 mm
Product weight 44 g

