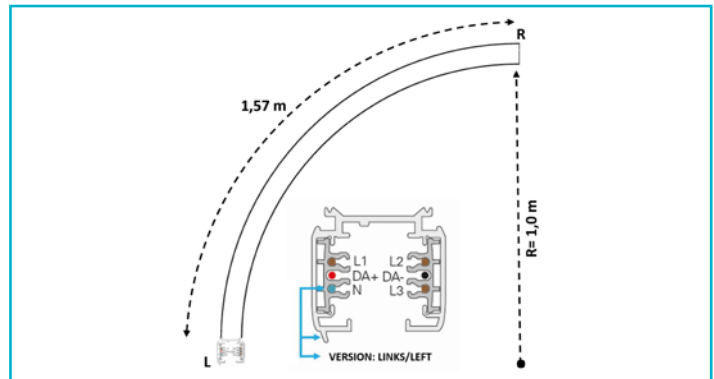


3-phase rail system**D LINE/DALI surface-mounted track, Curved 90°, R = 1m, L/W****Special features**

- Curved rail 90° (radius 1 m)
- enables completely new designs (corner, semi-circle, circle, wave)
- Segment length 1.57 m
- can be used as D Line DALI or D Line standard rail
- only suitable for standard current track adapters (length max. 12 cm)
- up to three phases [3x 16 A] can be fed in
- cutting tool required for DALI in-house assembly
- numerous attachment options

Housing Material	Aluminium
Housing Color	White
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Rated Input Voltage Frequency	220-440 V/AC 50 / 60 Hz
Protection Class	Protection class I/protective grounding
Output Current	16 A
Dimmable	Yes
Control	DALI 1 / DT8, DALI 1 / DT6, DALI 2 / DT8, DALI 2 / DT6
IP Protection Class	IP 20
Length	1570 mm
Width	35.2 mm
Height	35.5 mm
Product weight	1320 g

710121		D Line DALI electrical connector for curved tracks, white, Plastic, Traffic white RAL 9016 White
710063		D Line/Dali ceiling mounting bracket Flex, Metal, Traffic white RAL 9016 White
710117		D Line/Dali CURVED suspension bracket with 5m cable, white, Metal, Traffic white RAL 9016 White
710078		D Line/Dali Ceiling suspension rigid (63.5 cm) for three-phase, Aluminium, Traffic white RAL 9016 White
710086		D Line/Dali Extension f. ceiling suspension rigid (30 cm) , Aluminium, Traffic white RAL 9016 White
710083		D Line/Dali truss adapter, Aluminium, Silver
931066		D LINE DALI, cut-back tool for shortening the DALI wires, Metal
		Plastic, Silver
		Black
710110		D Line/Dali rope suspension with adj. crossbar, white, Metal, Traffic white RAL 9016 White