



# RIBELLE wall

INSTALLATION INSTRUCTIONS | MARCH 2025


Horizontal

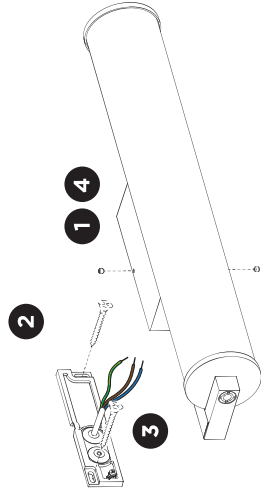

Vertical

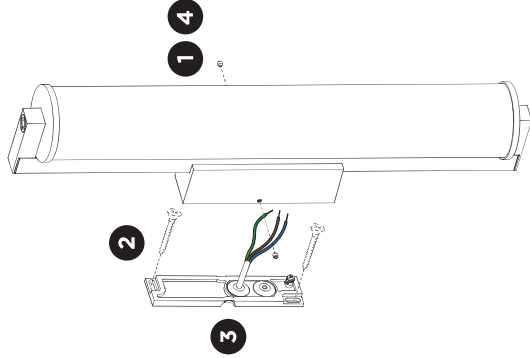


## DIMENSIONS




## MOUNTING INSTRUCTION

- 1 Remove the mounting base from the fixture by loosening the socket screws.
- 2 Mount the base on the wall with screws (screws are not included).
- 3 **POWER CONNECTION**  
Connect to 220-240V.

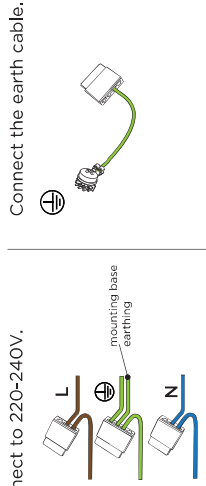


Always use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

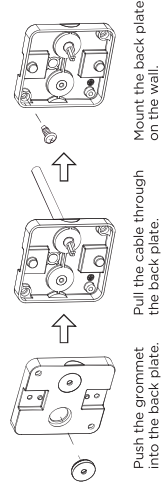

- 4 Fix the luminaire on the base with the socket screws.


Always use a matching grommet in the overview table.

|                             |                             |                        |                                                                                   |                                           |
|-----------------------------|-----------------------------|------------------------|-----------------------------------------------------------------------------------|-------------------------------------------|
|                             |                             |                        |                                                                                   |                                           |
| CABLE                       | TYPE                        | OUTSIDE Ø              | CONDUCTION SECTION                                                                |                                           |
| ROUND<br>H05RN-F<br>H07RN-F | ROUND<br>H05RN-F<br>H07RN-F | min 6,8mm<br>max 8,9mm | 20x3x 0,75mm <sup>2</sup><br>20x3x 1,0mm <sup>2</sup><br>20x3x 1,5mm <sup>2</sup> | min 1,5mm<br>max 2,6mm                    |
|                             |                             |                        |                                                                                   | 0,75mm <sup>2</sup><br>1,5mm <sup>2</sup> |

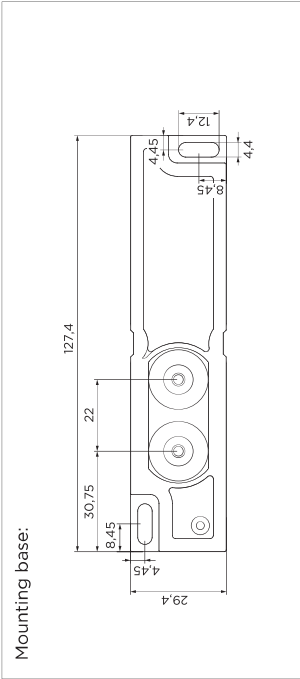

# RIBELLE wall

INSTALLATION INSTRUCTIONS | MARCH 2025

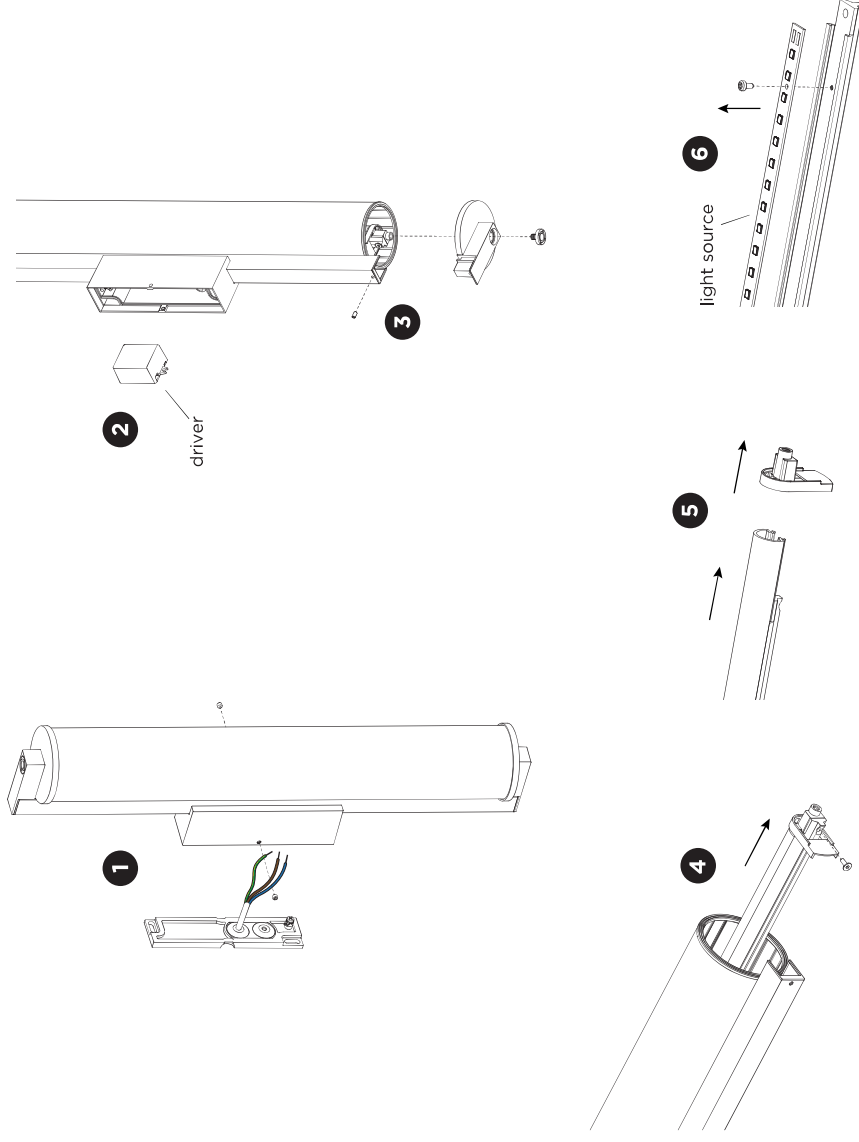


## DISMOUNTING AND RECYCLING INSTRUCTIONS Light source & driver

- 1** Dismount the fixture from the base by removing the socket screws.
- 2** Remove the driver.
- 3** Loosen the socket screw and remove the cover by unscrewing the screw.
- 4** Pull out the profile and loosen the screw of the fixation part.
- 5** Remove the fixation part and pull off the plastic cover.
- 6** Unscrew the light source to remove it.



The light source is replaceable by Wever & Ducré or by a professional with explicit authorisation. For more information please contact your local Wever & Ducré customer service point.



The driver can be replaced by the end user.



This luminaire contains a light source with the energy class E.



Use green electricity to light up your luminaire.